

### Field Adjustable Uplight Option (available with standard offering)



- » If you require light to pass through the back of your fixture into your ceiling space, choose an uplight component that will be suitable to your project (Range: 0% - 14%)
- » Unscrew and remove/adjust uplight aperture covers for your choice as follows:
  - iMEK (4-lamp) I-4-X & iMEK (6-lamp) I-6-X:
    - 0% uplight – leave all uplight covers at their preset location
    - 3.5% uplight – rotate a pair of outside or inside uplight covers (one pair or the other) 180° and reinstall on reflector covering half of the uplight opening
    - 7% uplight – rotate all uplight covers 180° and reinstall on reflector covering half of the uplight opening
    - 10.5% uplight – combine the 3.5% uplight option with the 7% uplight option
    - 14% uplight – completely remove uplight covers

» Note: It is advisable to wear gloves when handling the reflector surface in order to prevent fingerprints or markings on the reflector

### Tandem Mounting Kit (ordered separately)



- » Pop the large oval knock-out on the two (2) fixtures that you will be tandem mounting (choose the side closest to the quick-plate on one fixture and furthest on the other).



- » Butt the two fixtures together and bring through the wiring. Make all connections (pay attention to lead colors for multi-level switching).



- » Screw the fixtures together below the reflector using the hole locations and hardware (screws and locknuts) provided.



- » Fit the top straps across the two fixtures and secure with screws provided (top straps included in tandem mounting kit hardware).

Safely install fixture as per local electrical and building codes.

\*Note: Please use safety bushing or grommets when connecting wiring through fixture knockouts

For any questions please contact:

*Green-Lights Inc.*

PH# 1-866-GREEN-16 (473-3616)

FAX# 1-780-701-4142

[www.green-lights.com](http://www.green-lights.com)

**Wireguard/Lens/Louver Kit (ordered separately)**





- » Screw in the two sides and one of the two ends of the bottom lens kit
- » Slide in the lens
- » Screw in the final end piece

**Surface Mounting Kit (ordered separately)**



- » Use the Green-Lights Inc. box that the fixture arrives in to create a template for installing the Surface Mounting Kit

TEMPLATE DIMENSIONS:

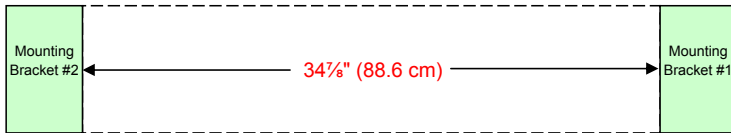

- » Screw the two (2) mounting brackets to the ceiling making sure that the mounting location will safely hold the weight of the fixture and brackets
- » Insert the mounting bolts into the pre-tapped holes on the sides of the fixture (two on each side) and hang the fixture on one end from a mounting bracket
- » Complete the wiring of the fixture (see *Installation Instruction Sheet* for direction)



- » Rotate fixture up to a horizontal position and slide the mounting bolts into the second bracket (all four mounting bolts should now be resting in the bracket channels)
- » Tighten the mounting bolts to secure the fixture in place